

1 to 4/8 CAT5 VGA + Audio Transmitter

Model No. : AV-702X-114VA /118VA

1 to 4/8 CAT5 VGA Transmitter

Model No. : AV-702X-114V /118V

The 1-to-4/8 CAT5 AV Transmitter simultaneously broadcasts, in real-time, both stereo audio and video images to multiple remote screens at great distances via a single, easy installed CAT5 cable.

Features



- ❖ Extends high-resolution VGA signal and high fidelity stereo audio to remote displays.
- ❖ Easily distributes one audio & video source to 4/8 displays simultaneously.
- ❖ Supports up to 1920 x 1200 @ 60Hz resolution.
- ❖ VGA out port on transmitter to connect a local monitor or for cascading other transmitter unit to increase the number of supported displays.

Specification

Model No.	AV-702X-114VA	AV-702X-118VA	AV-702X-114V	AV-702X-118V	
System Cable	CAT5, FTP Solid Wire 2x4x24 AWG., Standard 568B RJ-45 connector				
Connectors	System Out: RJ-45	4	8	4	8
	VGA In: HDD15F	1	1	1	1
	VGA Out: HDD15F	1	1	1	1
	Audio In: 3.5mm Jack	1(Blue)	1(Blue)	-	-
	Audio Out: 3.5mm Jack	1(Green)	1(Green)	-	-
	Power In: AC Jack	1	1	1	1
	Power LED	1 (Green)			
Distance	Depends on receiver, and on cable quality. 0~300M (0~1000 ft)				
Cascadable	Yes (by VGA Out port)				
Video	1920 x 1200 @ 60Hz				
Power Consumption	Max. 6W				
Works with	AV-701X-111/311/315 Receiver		AV-701X-101/301/305 Receiver		
Environment	Operating Temp.	0~70° C			
	Storage Temp.	-20~85° C			
	Humidity	0-80% RH, Non-condensing			
	Housing	Metal			
Physical Properties	Weight	860g (1.90 lb)			
	Dimensions (L x W x H)	13.4 x 21.3 x 4.4 cm (5.28 x 8.38 x 1.73 in.)			



Panel View

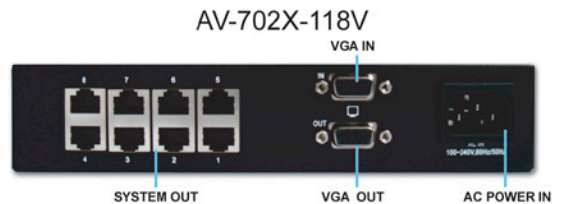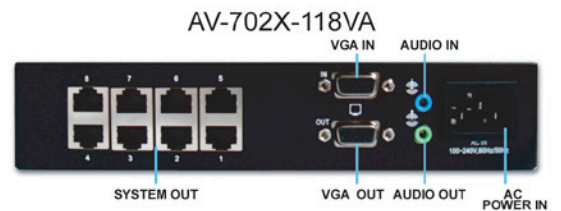

Diagram



Accessories

Rack Ears Kit for 1U 19-inch rack mounting
For single AV-702X-114/118xx

Model No. : Rack-S8X1

For dual AV-702X-114/118xx

Model No. : Rack-S8X2