


# BE-201H

## 2-port HD KVM Switch

The BE-201H is a 2-port  
HD with external Audio,  
Microphone, and USB 2.0

HUB KVM switch. User  
can manage 2 computers  
via this unique KVM

switch with its simplicity console of a single keyboard, mouse and HD monitor.

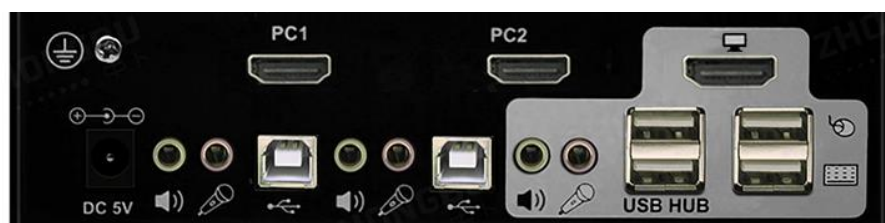

### Features:

- ❖ Sharing a common Keyboard, Mouse, Speaker/Microphone and Monitor as well as USB 2.0 devices for 2 PCs with HD outputs.
- ❖ Support resolutions: 4K@60, 1920x1200@60, 1080p ...
- ❖ Console built with USB 2.0 HUB to support devices such Touch, Storage, ...
- ❖ Console support EDID learning feature.
- ❖ Support Port Switching via front panel SELECT button & keyboard hotkeys.
- ❖ Support Port Switching via RS-232 (Optional).
- ❖ Support external 3.5mm Audio and Microphone.
- ❖ Support Online and Select status LED indicators.
- ❖ Front panel SELECT Button Extension Cable support.
- ❖ Hot pluggable, no software or drivers required.

# Panel Diagram

## Front View



## Rear View



## Switching Button Extension Cable



# Specifications:

|                           |              | BE-201H  |
|---------------------------|--------------|--|
| Computer Host Ports       | HD-IN        | 2-port HD Type A Female  |
|                           | USB Upstream | 2-port each USB-B  |
|                           | Audio        | 2-port each 3.5mm Line-In (Green) and Microphone (Pink)                      |
| Console Ports             | HD-OUT       | 1 x HD Type A Female   |
|                           | USB-A        | 2 x USB 2.0 (Touch, Storage, ...) + 2 x USB 1.1 (keyboard, mouse)            |
|                           | 3.5mm Audio  | 1 x Line-Out (Green) + 1 x Microphone (Pink)                                 |
| LED                       |              | 2 x On Line status (Red) + 2 x Select (Green)                                |
| PC Selection              |              | Front Panel SELECT button/Switching Button Extension Cable & keyboard hotkey |
| Keyboard Hotkey Selection |              | Ctrl + Ctrl / Scroll Lock+ Scroll Lock 1 or 2                                |
| RS-232 Selection Option   |              | BE-601RS85 + RS-485-to-RS-232 adapter  |
| Supported Resolutions     |              | 3840x2160@60Hz, 1920x1200@60Hz, 1080p, ...                                   |
| Power Adapter             |              | DC 5V, 1A  |
| Temperature               | Operating    | -10 ~ 50°C   |
|                           | Storage      | -20 ~ 60°C   |
| Humidity                  | Operating    | 0 ~ 80% Non-condensing   |
|                           | Storage      | 5 ~ 90%, Non-condensing  |
| Physical Properties       | Material     | Metal  |
|                           | Weight       | 820g   |
|                           | Dimension    | 168 x 99 x 44mm  |

# Diagram

