


## 4-port Multi-View KVM Switch *with* Roaming Mouse

The BE-411b is a 4-port USB KVM switch that provides for interaction with 4 PCs using a single Multiview screen and a Roaming mouse/keyboard. With excellent expandability, one Master BE-411b + four Slave BE-411b let the user interact with a maximum of 16 PCs.

The Multi-View feature provides simultaneously display from 4 PCs in real-time on a single monitor with full screen of Seamless-Switch, or 2x2/1+3 POP (Picture out Picture) mode.

The Roaming-Mouse feature provides the user simply moves the mouse cursor across screen borders in any direction, either horizontally or vertically, instantly selecting the PC they need to control – providing super easy-to-use KVM switching that saves time and desk space.

The BE-411b can be controlled by Front Panel Buttons, RS-232 commands, Keyboard Hotkeys, or Roaming Mouse.

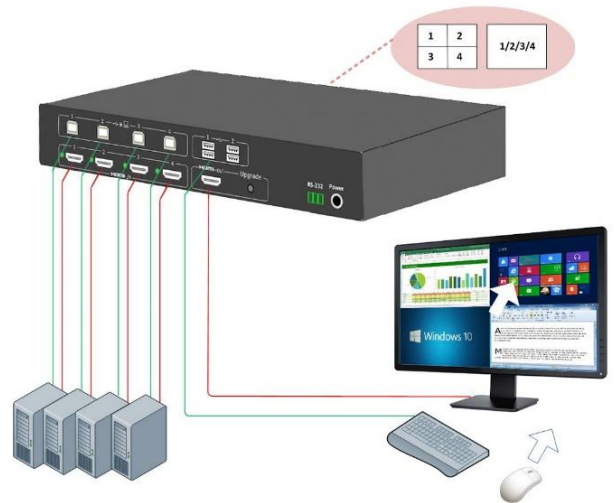


### Features

- ❖ 4-Port Multi-View and USB Seamless KVM Switch with Roaming Mouse support.
- ❖ Compliant with HD 1.3a, HDCP 1.2 with HDTV 1080p.
- ❖ Support Keyboard, Mouse, Touch Screen.
- ❖ Support Multi-View in 2x2, 1+3, and Full Screen display modes.
  - In 2x2 Mode, the entire screen is split into 4 sub-screen of equal size each displaying one of the 4 different sources.
  - In 1+3 Mode, any one of 4 sources can be selected and displayed in large left-window and accompanied by the other 3 sources in small right-windows of the screen.
  - In Full Screen Mode, any one of the 4 sources is displayed in full screen size.
- ❖ Support HD Audio De-embed output PCM2, 5.1, 7.1CH, Dolby 5.1, DTS5.1
- ❖ Seamless KVM switching between PCs by one Roaming Mouse or Hotkey.
- ❖ Pure hardware design, plug-and-play, no any additional software installation is required.
- ❖ Adjustable mouse speed.
- ❖ Control provided with front panel buttons, RS-232, Hotkey, Free-Flow Mouse.
- ❖ Provides RS-232 port with Commands format for third party external control.
- ❖ Firmware upgradable.

## Specification

Model		BE-411b
Connectors	HD In	4 (Female)
	HD Out	1 (Female)
	USB Upstream	4 (to PC)
	USB Downstream	4 (keyboard, mouse, touch, expansion)
	LED Light Indicator	4
	RS-232	3-pin Phoenix terminal block x 1
Video Bandwidth		2.25Gbps
Audio Out		PCM2, 5.1, 7.1CH, Dolby 5.1, DTS5.1
Input Resolution		480i60Hz,480p60Hz,576i50Hz,576p50Hz, 720p50/60Hz,1080i50/60Hz,1080p24/30/50/60Hz, 800x600@60,1024x768@60, 1280x720@60,1920x1080@60;
Output Resolution		1080p,1080i,720p,1024x768,1360x768
ESD Protection		Human Body model: $\pm 8$ kV (air-gap discharge) $\pm 4$ kV (contact discharge)
Power Supply		12 V/2.0A DC
Power Consumption		10W
Environment	Operating Temp.	0~40°C
	Storage Temp.	-20~60°C
	Humidity	20~90% Non-condensing
Physical	Housing	Metal
	Weight	1Kg
	Dimensions	275 (L) x 115 (W) x 43 (H) mm

## Front & Rear View

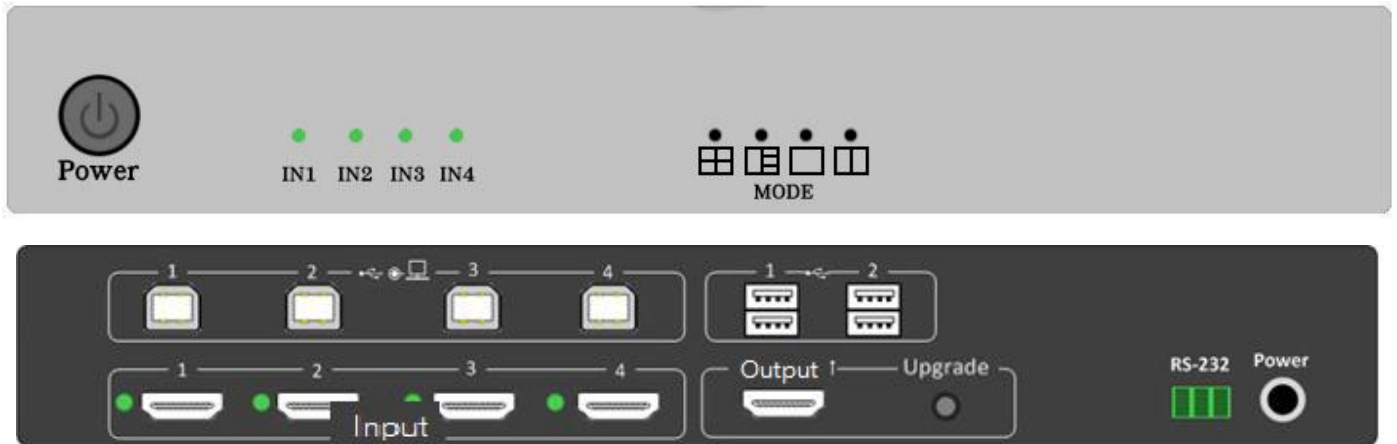

## Diagram

