


BE-201D

2-port DVI KVM Switch

The BE-201D is a 2-port DVI with external Audio, Microphone, and USB 2.0 HUB KVM switch. User can manage 2 computers via this unique KVM switch with its simplicity

console of a single keyboard, mouse and DVI monitor.

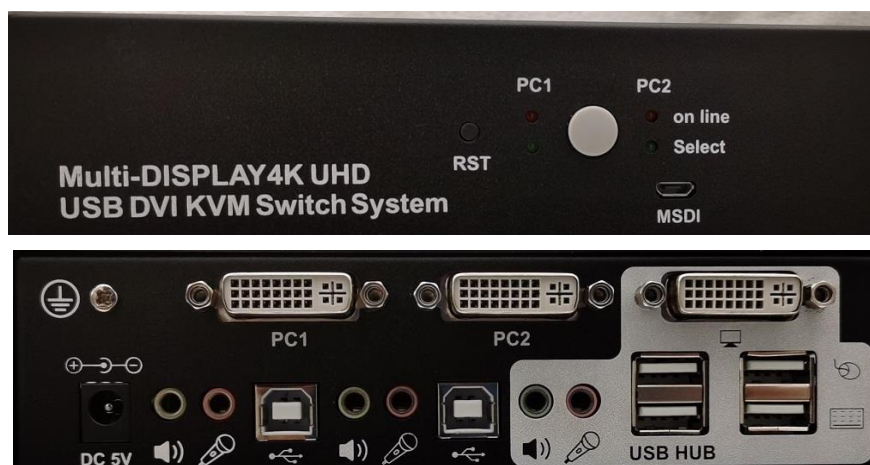

Features:

- ❖ Sharing a common Keyboard, Mouse, Speaker/Microphone and Monitor as well as USB 2.0 devices for 2 PCs with DVI outputs.
- ❖ Support single-link DVI resolutions 1920x1200@60, 1080p ... and 4K60 if a DVI-HD adapter is used.
- ❖ Console built with USB 2.0 HUB to support devices such Touch, Storage, ...
- ❖ Console support EDID learning feature.
- ❖ Support Port Switching via front panel SELECT button & keyboard hotkeys.
- ❖ Support Port Switching via RS-232 (Optional).
- ❖ Support external 3.5mm Audio and Microphone.
- ❖ Support Online and Select status LED indicators.
- ❖ Front panel SELECT Button Extension Cable support.
- ❖ Hot pluggable, no software or drivers required.

Front View



Rear View



Switching Button Extension Cable



Specifications:

		BE-201D
Computer Host Ports	DVI-IN	2-port DVI-D Female
	USB Upstream	2-port each USB-B
	Audio	2-port each 3.5mm Line-In (Green) and Microphone (Pink)
Console Ports	DVI-OUT	1 x DVI-D Female
	USB-A	2 x USB 2.0 (Touch, Storage, ...) + 2 x USB 1.1 (keyboard, mouse)
	3.5mm Audio	1 x Line-Out (Green) + 1 x Microphone (Pink)
LED		2 x On Line status (Red) + 2 x Select (Green)
PC Selection		Front Panel SELECT button/Switching Button Extension Cable & keyboard hotkey
Keyboard Hotkey Selection		Ctrl + Ctrl / Scroll Lock+ Scroll Lock 1 or 2
RS-232 Selection Option		BE-601RS85 + RS-485-to-RS-232 adapter
Supported Resolutions		3840x2160@60Hz, DVI 1920x1200@60Hz, 1080p, ...
Power Adapter		DC 5V, 1A
Temperature	Operating	-10 ~ 50°C
	Storage	-20 ~ 60°C
Humidity	Operating	0 ~ 80% Non-condensing
	Storage	5 ~ 90%, Non-condensing
Physical Properties	Material	Metal
	Weight	820g
	Dimension	168 x 99 x 44mm

Diagram

