


BE-401H

HD 4K@60 /USB KVM Switch

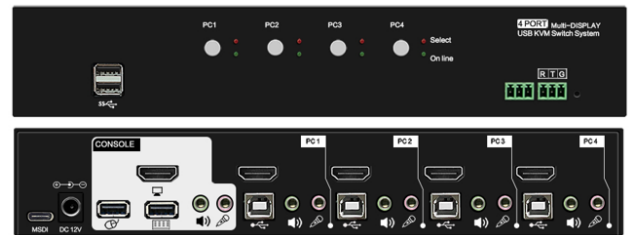

The BE-401 is a 4-port HDMI 4K@60/USB KVM switcher that provides a single HDMI display output and one mouse&keyboard to operate up to 4 source PCs

The BE-401 can be controlled by Front Panel Buttons or hotkey to select the source from 4 PCs.


Features

- ❖ 4-Port 4k@60 HDMI and USB KVM Switch .
- ❖ Compliant with HDMI 4K@60,1920x1200, and 1080p resolutions.
- ❖ Support Keyboard, Mouse, Touch Screen.
- ❖ Support usb 1.1,usb2.0 and usb 2.0 hub, and is compatible to usb3.0.
- ❖ Control provided with front panel buttons,and Hotkey.
- ❖ Supports audio switch with Mic In/Speaker.

Specification

Model		BE-401H
Connectors	HDMI In	4 (Female)
	HDMI Out	1 (Female)
	USB Upstream	4 (to PC)
	USB Downstream	4 (keyboard, mouse, touch, expansion)
	LED Light Indicator	4
	RS-232	DB9 x 1 3-pin Phoenix terminal block x 1
Device Out(Audio)		Mic 3.5mmx1,Speaker 3.5mmx1
Device In (Audio)		Mic 3.5mmx4,Speaker 3.5mmx4
Input Resolution		1920x1080@60,4k@60
Output Resolution		1920x1080@60,4k@60
Power Supply		12V/2A DC
Environment	Operating Temp.	0~50°C
	Storage Temp.	-20~60°C
	Humidity	20~80% Non-condensing
Physical	Housing	Metal (Black)
	Weight	1kg
	Dimensions	245(L) x 92 (W) x 44(H) mm

Front & Rear View

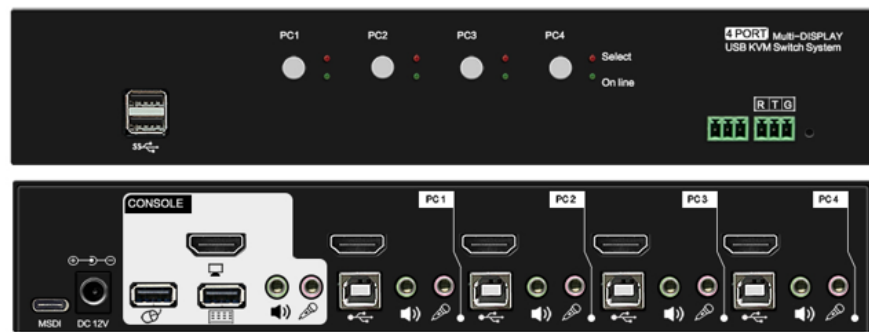

Diagram

